

STAR SERIES

MONO PERC
120-cell MODULE

EG-460M60-HLV

440~460W

0~3% POSITIVE TOLERANCE

KEY FEATURES



Mbb cell design

Multi Busbar cells bring lower resistance and increased Busbar reflectance ensures higher power output



High compatibility

Innovative 182mm big cell, small size model design, compatible to variance Roof-top and installation methodology



High Reliability

Strict in-house testing in PV Lab which is CNAS approved & TUV /VDE certified



Excellent Low-light Performance

Advanced solar cell and glass surface texturing technology allows for excellent performance in low-light environments



Highly Mechanical Load Design

Certified to withstand: 5400Pa snow load and 2400Pa wind load




PID Resistant

Excellent PID resistance performance optimized by unique structural design

LINEAR PERFORMANCE WARRANTY


12 12 Year Product Warranty **25** 25 Year Linear Power Warranty

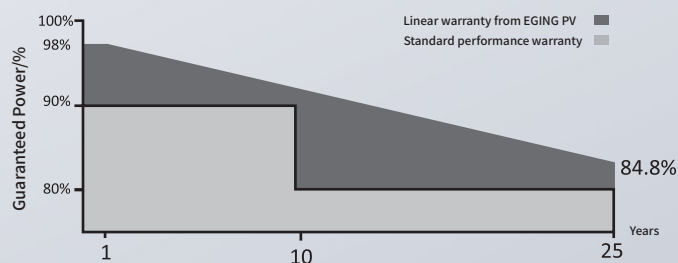


As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGING PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

EG-460M60-HLV

Engineering Drawings

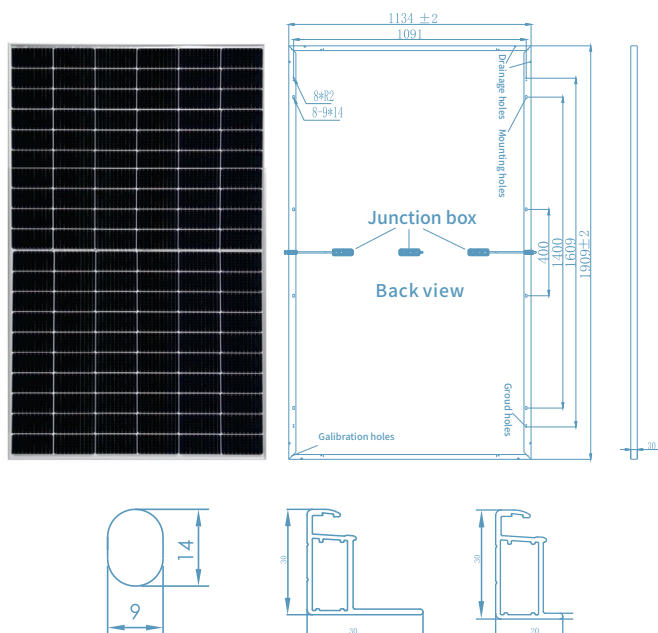

I-V Curves

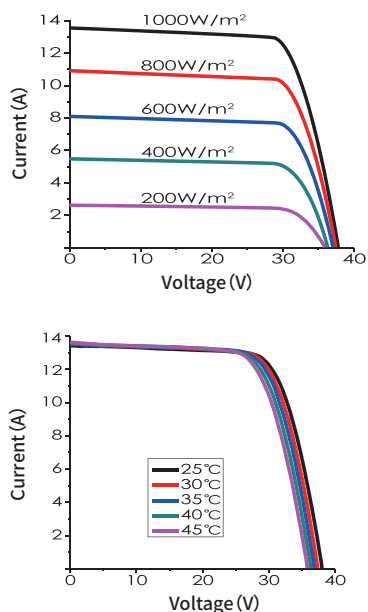

Packing Configuration

Pieces per pallet	36
Size of packing (mm)	1940*1135*1255
Weight of packing (kg)	848
Pieces per container	864
Size of container	40'HC

Electrical Characteristics

Power level	440	445	450	455	460
Pmax (W)	440	445	450	455	460
Vmp (V)	34.71	34.93	35.16	35.39	35.61
Imp (A)	12.68	12.74	12.80	12.86	12.92
Voc (V)	41.51	41.73	41.96	42.19	42.41
Isc (A)	13.43	13.49	13.55	13.61	13.67
Module efficiency (%)	20.32	20.55	20.78	21.01	21.24
Maximum system voltage (V)	1500				
Fuse Rating (A)	25				
Temperature coefficient Pmax (%/°C)	-0.350				
Temperature coefficient Isc (%/°C)	0.05				
Temperature coefficient Voc (%/°C)	-0.275				

STC:Irradiance 1000W/m²,module temperature 25°C,AM=1.5

Working Characteristics

Power level	440	445	450	455	460
Pmax (W)	333	337	341	344	348
Vmp (V)	32.43	32.63	32.85	33.06	33.27
Imp (A)	10.27	10.33	10.38	10.41	10.46
Voc (V)	38.78	38.98	39.20	39.41	39.62
Isc (A)	10.90	10.95	11.00	11.05	11.10
Power tolerance (%)	0~+3				
NOCT (°C)	44±2				

NOCT:Conditions:Irradiance 800W/m²,ambient temperature 20°C, wind speed 1m/s

Mechanical Characteristics

Number of cells	120pcs
Size of cell (mm)	182*91
Type of cell	Mono
Thickness of glass (mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1909*1134*30
Weight (kg)	22.3
Cables/connectors	4mm², MC4 compatible
Length of Cabel	Portrait :+300mm/-300mm

Maximum Ratings

Operating Temperature(°C)	-40~85
Operating humidity(°C)	5~85
Allowable Hail Load	25mm ice-ball with velocity of 23m/s

Revised in July 2022 1st Edition

CAUTION:All rights reserved by EGING PV.

Specifications included in this datasheet are subject to change without notice.



Tel:86-519-82585880

Zip:213213

Add:No.18,Jinwu Road,Jintan Dist,
Changzhou City,Jiangsu Province.

Email:marketing@egingpv.com

Web:www.egingpv.com